

HONDA

CB1000R 18-19
 CB500X 19
 CB650R 19
 CBF125 NA 17-19
 CBF300 NA 18-19
 VFR800X Crossrunner 15-19
 VFR1200X Crosstourer 12-19
 CRF1000L 15-19
 CTX700
 CTX1300 14-19

YAMAHA

MT-10/FZ-10 16-19
 Super Tenere
 MT-09 Tracer FJ-09 15-19
 XT1200z 10-19
 YZ125 07-19
 YZ250 07-19
 YZ250-F 07-19
 WR450F 06-19
 WR250F 07-19
 YFZ 450 07-
 YFZ 250
 YFZ 125

SUZUKI

Burgman 650 06-18
 Burgman 200 14-18
 Burgman 400 06-18
 TL1000 98-05
 TL1000S 97-01
 RF 90 0 93-99
 RF 600 93-98
 GSXR SRAD 97-00
 SVS 08-11
 GSX-R125 17-19
 GSX-R250 18-19
 GSX-R300 18-19
 GSX-R60 97-19
 GSX-R75 96-19
 GSX-R1000 01-19
 GSX-R1100 86-98
 GSX1300R Hayabusa 99-07
 RMZ450

KAWASAKI

Ninja 125 18-19
 EX250 13-19
 Ninja 250SL 15-19
 EX300" 12-19
 Ninja 400 18-19
 ER-4f" 11-19
 EX500/GPZ500S" 87-09
 Ninja 900 83-03
 Z1000S/Z1000SX" 11-19
 ZX-6/ZZR600 90-08
 Ninja ZX-6R 98-19
 Ninja ZX-7R 89-03
 Ninja ZX-9R 94-03
 Ninja ZX-10R 04-19
 Ninja ZX-12R 00-06
 ZZR1400 06-19
 ZZ-R1200 02-05
 ZZ-R 1100" 90-01
 ZZR600 90-08
 ZZR1100 ZX-11 93-01
 ZZR1200 02-05
 Concours 14" 08-18
 Vulcan 1700 09-13
 KFX 450 04-

DUCATI

748 94-03
 749 03-06
 848 08-13
 899 13-15
 916
 996 99-02
 998 02-04
 999 03-06
 1098 07-09
 1198 09-11
 Panigale
 899 Panigale 13-15
 959 Panigale 16-19
 1199 Panigale 11-14
 1299 Panigale 15-19
 Ducati ST2 97-03
 Ducati ST3 04-07
 Ducati ST4 99-05
 SUPER SPORT 620 / 800 / 1000
 Monster S2R 06-09
 Monster S4R 02-09
 Diavel 10-18
 Xdiavel/S 15-18
 Hypermotard
 Hypermotard 796 10-11
 Hypermotard 821
 Hypermotard 939/939SP

APRILIA

RSV4 RSV1000R 09-19
 RS125 99-18
 RS250 95-03
 RSV Tuono 02-05
 Tuono 1000 R 06-10
 Tuono V4 APRC 12-18
 Tuono V4 1100 15-18
 RSVR, RSV2" 04-10
 RS4 125 50 11-18
 Shiver 08-18
 Mana 850 07-11
 Dorsoduro 750 08-15
 Dorsoduro 1200 11-18
 Dorsoduro 900 17-18
 Caponord 1200 15-18

KTM

625 SMC 06-07
 640 SMC 06-07
 660 SMC
 690 SMC 08-18
 950 SM
 990 SMR
 950LC 05-07
 990LC 07-09
 790 Adventure 19-
 950 Adventure
 990 Adventure 06-13
 1050 Adventure 15-19
 1090 Adventure 17-19
 1190 Adventure 13-18
 1290 Super Adventure 15-18
 690 E + R 17-
 Freeride E-XC 14-19
 105SX/XC 04-11
 125 EXC/SX 01-05
 150 SX/XC 08-19
 200 XC-W/SX/MXC 97-16
 250 XC /XCF-W /XC-W /SX-F 07-11
 300XC/XC-W 04-11
 350EXC/XC/SX
 400 EXC
 450EXC/SX/XC/XC-W/XC-F 04-10
 500EXC/XC
 XC525 08-

TRIUMPH

Daytona
 Daytona 600 02-04
 Daytona 650 05-06
 Daytona 675 06-14
 Daytona 675R 13-18
 Daytona 750 90-92
 Daytona 955i 05-06
 Daytona 1000 90-92
 Trophy 1200 90-04
 Tiger 800 10-19
 Tiger 800 XCX 14-19
 Tiger 800 XR 14-19
 Tiger 800 XRX 14-19
 Tiger 800 XRT 17-19
 Tiger 1200 XCA 17-19
 Tiger 1200 XR 17-19
 Tiger 1200 XRR 17-19
 Tiger 1200 XRX 17-19
 Tiger Explorer XC/XCA/X 11-18
 Speed Triple 1050 i 10-19
 Speed Triple R/RS 15-19
 Speed Triple S 18-19
 Street Scrambler 16-19
 Street Triple 675/R 10-16
 Street Triple R 09-19
 Street Triple S 17-19
 Street Triple RS 16-19
 Street Twin 16-19
 Sprint 900 91-98
 Sprint GT 00-12
 Trophy 12-19
 Rocket III 04-19
 Thunderbird 11-14
 Scrambler 06-19

MV AUGUSTA

F4 2000-2014
 F4 R 2013-2014
 F4 RC 2015-2019
 F4 RR 2012-2017
 F3 675 13-18
 RIVALE 800
 BRUTALE
 Brutale 675 13-18
 Brutale 910 06-08
 Brutale 800 13-19
 Turismo Veloce 800 14-19

MOTO GUZZI

Stelvio 1200 09-11

HUSABERG


FC450 04-05
 FC550 04-05
 FE250 13-19
 FE350 13-19
 FE390 10-19
 FE450 09-19
 FE450E 04-08
 FE550E 04-08
 FE570 09-19
 FE650E 04-08
 FS450E 04-08
 FS650C 05-08
 FS650E 04-08
 FX450 10-11
 TE125 12-19
 TE250 11-19
 TE300 11-19

HUSQVARNA

FC250 14-19
 FC350 14-19
 FE250 14-19
 FE350 14-19
 FE350S 16-19
 FE450 14-19
 FE501 14-16
 FE501S 16-19
 TC125 14-19
 TC250 14-19
 TC85 14-19
 TE125 14-19
 TE250 14-19
 TE300 14-19

BETA

250 RR (2 Stroke) 13-19
 300 RR (2 Stroke) 13-19
 350 RR 12-19
 390 RR 15
 400 RR 12-19
 430 RR 15
 450 RR 12-19
 498 RR 12-19

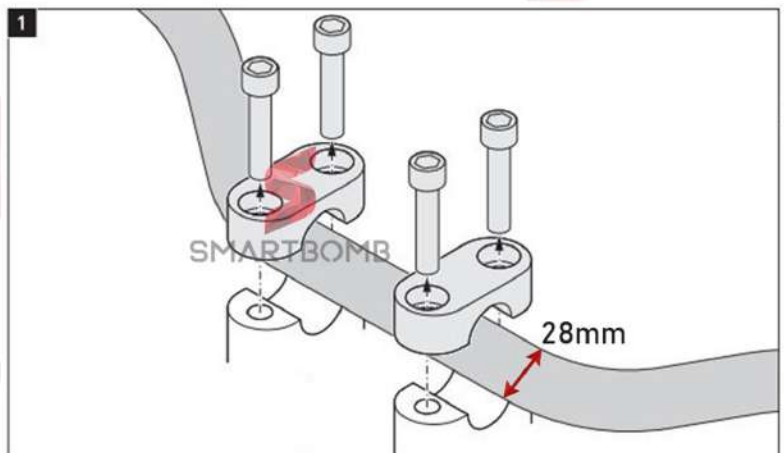

Per verificare la compatibilità al fine di evitare disguidi, il manubrio deve avere un diametro di 28mm
 Para verificar la compatibilidad para evitar errores, el manillar debe tener un diámetro de 28 mm
 To check the compatibility in order to avoid mistakes, the handlebar must have a diameter of 28mm
 Pour vérifier la compatibilité afin d'éviter les erreurs, le guidon doit avoir un diamètre de 28mm
 Um die Kompatibilität zu überprüfen, um Fehler zu vermeiden, muss der Lenker einen Durchmesser von 28 mm